

PROJECT : _____

LOCATION : _____



ISSUE DATE : _____

TYPE : _____

Sale.lumenplus@gmail.com +66.64.002.5554

LUMENPLUS CO., LTD. 98/88 ซอยขอนแก่น 36 แขวงสวนหลวง เขตสวนหลวง กรุงเทพฯ 10250

www.lumenpluslighting.com

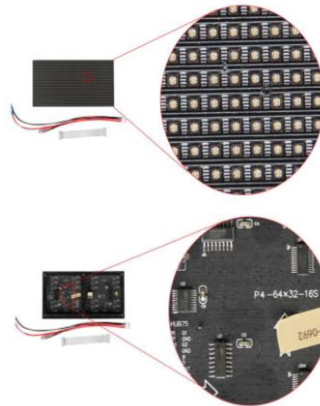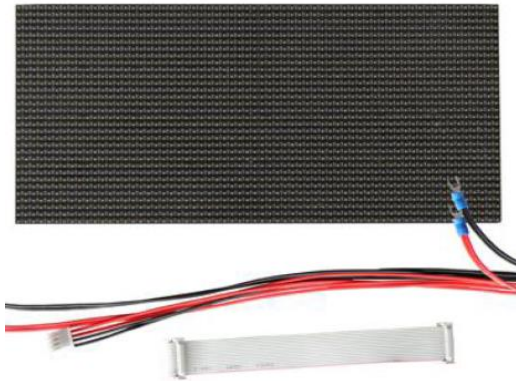

LED SCREEN P4 INDOOR SPECIFICATIONS

Pixel Pitch	4mm
LED Encapsulation	SMD2020 LEDs
LED Configuration	4in1 1R 1G 1B
Pixel Density	62500dot/sqm.
Driver IC	Refresh Rate : up to 3840Hz
Scan Mode	1/16
Brightness	>1000nits
Color Temperature	6500-9000K
Viewing Distance	5-100m
Viewing Angle	Horizontal $\geq 140^\circ$, Vertical 140°
Protection Level	IP43
Module Size	256 x 125mm
Module Quantity	N/A
Power Consumption	220W-700W/sqm.
Working Voltage	220V AC $\pm 15\%$, 50Hz $\pm 2\text{Hz}$
Grey Level	14bit
Refresh Rate	$\geq 1920\text{Hz}$
Working Humidity	10% - 60%
Working Temperature	-20°C - +60°C
Switching Power Supply	5V / 40A
Work Life	$\geq 100,000$ hours / Continuous working > 72Hours